

Intertek Testing Services Shanghai Building No.86, 1198 Qinzhou Road (North), Caohejing Development Zone, Shanghai 200233, China Tel:86 21 6127 8200 Fax:86 21 6495 6263

Test Verification of Conformity

On the basis of the referenced test report(s), sample(s) of the below product have been found to comply with the harmonized standards and Directives listed on this verification at the time the tests were carried out. Other standards and Directives may be relevant to the product.

compliance by signing a Declaration of Conformity themselves and applying the mark to product identical to the test sample(s) if the product complies with all relevant CE mark Directives requirements.

Applicant Name & Address

Zhejiang Chint Electrics Co.,Ltd.

No.1 Chint Road, Chint Industrial Zone, North Baixiang,

Yueqing, Zhejiang Province, P.R.China. 325603

Manufacturing site Name & Address

Same as applicant

Product(s) Tested

Control circuit devices and switch elements

Ratings and principal

Ith=10A

characteristics

AC-15: 1,9A, 415~ / 3A, 240~ / 6A, 120~ DC-13: 0.27A, 250d.c. / 0.55A, 125d.c.

IP65 (for head part after normal installation)

Model(s)

NP8

Brand name

CHNT

Relevant Standard(s) /

Specification(s) / Directive(s)

EN 60947-5-1: 2004 + A1:2009

the Low Voltage Directive 2006/95/EC

Verification Issuing Office Name:

& Address

Intertek Testing Services Shanghai

Building No.86, 1198 Qinzhou Road (North), Shanghai

200233, China

Verification Number

150400450SHA-V1

Report Number(s)

150400450SHA-001

NOTE 1: This verification is part of the full test report(s) and should be read in conjunction with it.

This Verification is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Verification. Only the Client is authorized to copy or distribute this Verification. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this Verification are relevant only to the sample tested. This Verification by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Oliver Wei Manager May 27, 2015



Intertek Testing Services Ltd., Shanghai, Building No.86, 1198 Qinzhou Road (North), Caohejing Development Zone, Shanghai 200233, China Tel:86 021 6127 8200 Fax:86 21 6495 6263

Annex to Test Verification of Conformity

This is an Annex to Test Verification of Conformity with 150400450SHA-V1. The issuing office is Intertek Testing Services Shanghai Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China

Additional information:

All types of pushbutton have the same basic contactor block. Operated by manual.

No. of circuit: 1, 2 and 3.


Ratings of contactor block: Ith=10A

Utilization category		Ratings		
AC-15	U _e (V)	415	240	120
	I _n (A)	1,9	3	6
DC-13	U _e (V)	250	125	1
	I _n (A)	0,27	0,55	/

Ratings for illuminated pushbutton:

Type of lamp	LED lamp		
U _e (V)	AC/DC 6, 12, 24, 36, 110, 220, 230		
$I_n(A)$	≤20mA		

Type Designation:

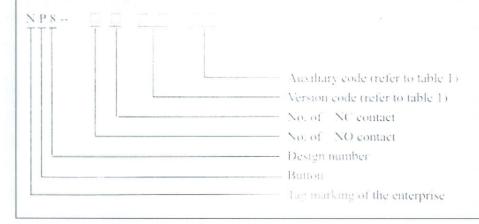



Intertek Testing Services Ltd., Shanghai, Building No.86, 1198 Qinzhou Road (North), Caohejing Development Zone, Shanghai 200233, China Tel:86 021 6127 8200 Fax:86 21 6495 6263

Annex to Test Verification of Conformity

This is an Annex to Test Verification of Conformity with 150400450SHA-V1. The issuing office is Intertek Testing Services Shanghai Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China

Table 1

Version			
Code	Designation	Auxiliary code	
BN .	Flush button		
GN	Projecting button		
M	Mushroom-headed reset button	Max. Diameter of operating mechanism: 1 [Φ40] 2 [Φ60] 3 {Φ30}	
ZS	Mushroom-headed self-locking and rotary reset button		
MD	Illuminated mushroom-headed reset button		
SD	Illuminated double-headed button		
XD	Illuminated rotary button	21[Two position locking] 22[Two positions rese 31[Three position locking] 33[Three positions reset]	
X	Rotary button		
Υ	Keyed button	37[Left position locking; right position reset] 38[Right position locking; left position reset]	
S	Double-headed button	- sq. mg/m poolsion reset	
BND	Illuminated flush button		
GND	Illuminated projecting button		
D	Indicator light		

NOTE 1: This verification is part of the full test report(s) and should be read in conjunction with it.

This Verification is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Verification. Only the Client is authorized to copy or distribute this Verification. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this Verification are relevant only to the sample tested. This Verification by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Oliver Wei Manager May 27, 2015

aun