



AX-5 (Auxiliary Contact for NL1, NL210)

1. General


Indication of the position of the device's contacts.
To be mounted on the left side of the RCD(RCCB)
thanks to the special pin.



2. Technical data

	Standard		IEC/EN 60947-5-1	
Electrical features	Rated value		UN (V)	In (A)
			AC415 50/60Hz	3
			AC240 50/60Hz	6
			DC130	1
			DC48	2
			DC24	6
	Configurations		1NO/1NC	
Rated impulse withstand voltage (1.2/50)Uimp	V	4,000		
Dielectric TEST voltage at ind. Freq. for 1min	kV	2		
Insulation voltage Ui	V	500		
Pollution degree		2		
Mechanical features	Electrical life		6,000	
	Mechanical life		10,000	
	Protection degree		IP20	
	Ambient temperature (with daily average ≤35°C)	°C	-5...+40	
	Storage temperature	°C	-25...+70	
Installation	Terminal connection type		Cable	
	Terminal size top/bottom for cable	mm ²	2.5	
		AWG	18-14	
	Tightening torque	N·m	0.8	
In·lbs.		7		

3. Overall and mounting dimensions (mm)

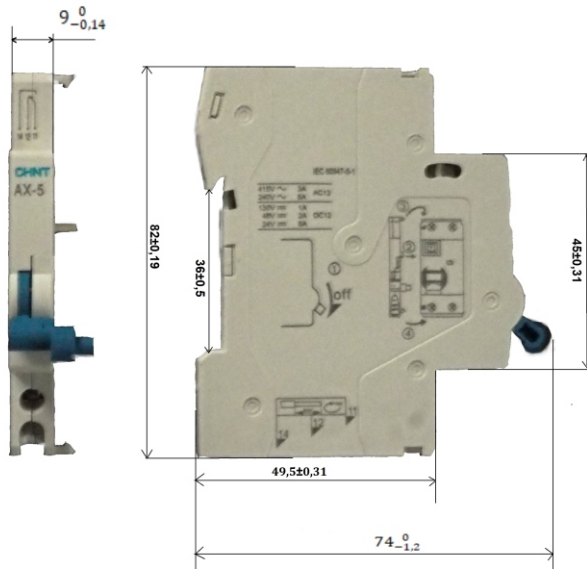

4. Installation

